

## Ash & Lacy Building Systems Limited

Bromford Lane  
West Bromwich  
West Midlands  
B70 7JJ

**Tel:** 0121 525 1444  
**Fax:** 0121 525 3444  
**Web:** www.ashandlacy.com




### Product Datasheet – LS & HS


Carbon steel self-drilling

<b>Application:</b>	Built-up and single skin to light and heavy section steel purlins and rails
<b>Head Options:</b>	5/16"(8mm) A/F Hex and 11mm Coloured Bi-Hex
<b>Washer Options:</b>	16mm, 19mm and 29mm stainless steel / EPDM vulcanised
<b>Material:</b>	Carbon steel
<b>Coating:</b>	Silver organic finish provides lower overall tapping torque and excellent corrosion resistance

Built-up and single skin to light section steel purlins and rails				
Product Code	Diameter x Length (mm)	Effective Thread Length (mm)	Full Thread	Drilling Capacity (mm)
LT17-(00E55)	4.8 x 17	5	Yes	1.2 – 3.2
LT19-(00E55)	4.8 x 19	7	Yes	1.2 – 3.2
LS25	5.5 x 25	13	Yes	1.2 – 3.2
LS25-S16/S19-(COL)	5.5 x 25	10	Yes	1.2 – 3.2
LS32-S16/S19-(COL)	5.5 x 32	17	Yes	1.2 – 3.2
LS38-S16/S19-(COL)	5.5 x 38	23	Yes	1.2 – 3.2
LS46-S16/S19-(COL)	5.5 x 46	31	Yes	1.2 – 3.2
LS57-S16/S19-(COL)	5.5 x 57	42	Yes	1.2 – 3.2
LS70-S16/S19-(COL)	5.5 x 70	55	Yes	1.2 – 3.2

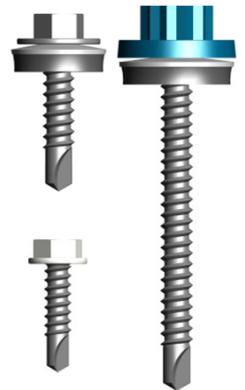

Built-up and single skin to heavy section steel purlins and rails				
Product Code	Diameter x Length (mm)	Effective Thread Length (mm)	Full Thread	Drilling Capacity (mm)
HS38	5.5 x 38	16	Yes	4.0 – 12.0
HS38-S16/S19-(COL)	5.5 x 38	13	Yes	4.0 – 12.0
HS55-S16/S19-(COL)	5.5 x 55	30	Yes	4.0 – 12.0
HS75-S16/S19-(COL)	5.5 x 75	50	Yes	4.0 – 12.0

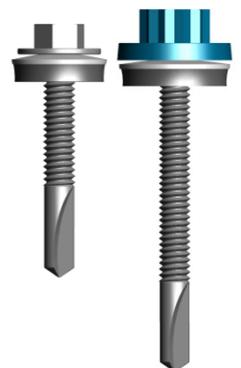

**Note:** Effective thread lengths are based on maximum drilling capacity