

Ash & Lacy Building Systems Limited

Bromford Lane
West Bromwich
West Midlands
B70 7JJ

Tel: 0121 525 1444
Fax: 0121 525 3444
Web: www.ashandlacy.com




Product Datasheet – TF


Carbon steel self-drilling

Application:	Single skin, built-up and composite panels to timber purlins and rails
Head Options:	5/16"(8mm) A/F Hex and 11mm Coloured Bi-Hex
Washer Options:	16mm, 19mm and 29mm stainless steel / EPDM vulcanised
Material:	Carbon steel
Coating:	Silver organic finish provides lower overall tapping torque and excellent corrosion resistance

Single skin to timber purlins and rails				
Product Code	Diameter x Length (mm)	Effective Thread Length (mm)	Full Thread	Drilling Capacity (mm)
TF25-S16/S19-(COL)	6.3 x 25	22	Yes	0.7 to timber
TF32-S16/S19-(COL)	6.3 x 32	29	Yes	0.7 to timber
TF45-S16/S19-(COL)	6.3 x 45	42	Yes	0.7 to timber



Built-up and composite panels to timber purlins and rails				
Product Code	Diameter x Length (mm)	Panel Range (mm)		Drilling Capacity (mm)
		Min.	Max.	
TF65-S16/S19-(COL)	6.3 x 65	10	20	0.7 to timber
TF80-S16/S19-(COL)	6.3 x 80	25	35	0.7 to timber
TF95-S16/S19-(COL)	6.3 x 95	25	50	0.7 to timber
TF105-S16/S19-(COL)	6.3 x 105	40	60	0.7 to timber
TF125-S16/S19-(COL)	6.3 x 125	60	80	0.7 to timber
TF150-S16/S19-(COL)	6.3 x 150	70	100	0.7 to timber
TF175-S16/S19-(COL)	6.3 x 175	95	125	0.7 to Timber

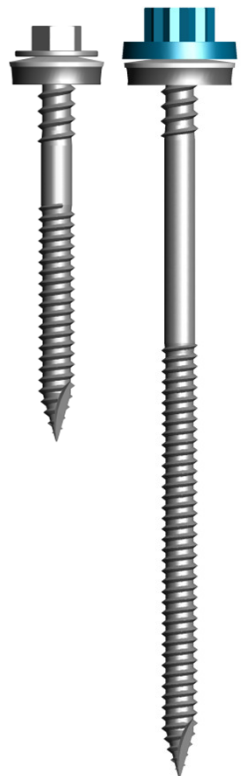

Note: Panel Ranges have been based on minimum recommended embedment of 40mm