

Insulated Panel Systems

United Kingdom

Protected by



Sinusoidal Insulated Roof Panel KS1000 SRW Data Sheet



KS1000 SRW

Sinusoidal


Applications

The KS1000 RW is a through-fix sinusoidal profiled insulated roof panel which can be used for building applications with roof pitches of 4° or more after deflection.

Available Lengths

Standard Lengths	1.8 - 14.5m
Longer Lengths (non-standard)	14.5 - 17.8m

Note: Additional costs and transport restrictions may apply for non-standard lengths. All lengths may change for export (outside of the UK).

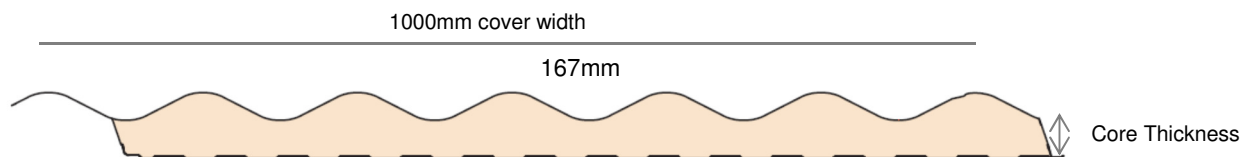

Dimensions, Weight & Thermal Performance

Core Thickness (mm)	40	60	80
Overall Thickness (mm)	70	90	110
U-value (W/m ² K)*	0.46	0.32	0.25
Weight kg/m ² 0.5/0.4 Steel	10.3	11.3	12.0

The KS1000 SRW insulated roof panels have a Thermal Transmittance (U value), calculated using the method required by the Building Regulations Part L2 (England & Wales) and Building Standards Section 6 (Scotland).

KS1000 SRW

Sinusoidal

Insulation Core

KS1000 SRW insulated roof panels are manufactured with an ECOsafe and FIREsafe polyisocyanurate (PIR) core.

Fire

The external and internal faces of the panel to be Class 0 in accordance with the Building Regulations when tested to BS 476: Part 6: 2009 and Part 7: 1997. The panel is rated SAA when tested to BS 476: Part 3: 2004.

This FIREsafe system has passed all the requirements of LPS1181: 2005: Part 1: Issue 1.2, ceiling lining tests by the Loss Prevention Certification Board (LPCB) certified to LPS 1181 Grade EXT-B. Reaction to fire classification according to BS EN 13501-1:2007+A1:2009: B-s1d0.



LPS 1181 : Issue 1.2
Cert No: 260a & 186a

Environmental

Kingspan Insulated Panels produced in the UK are certified to BES 6001 (Framework Standard for the Responsible Sourcing of Construction Products) 'Very Good'. Kingspan Insulated Panels directly contribute to BREEAM/LEED credits.

Air Leakage

An air leakage rate of 3m³/hr/m² at 50Pa or less can be achieved when using Kingspan insulated roof and wall panels.

Acoustic

Sound Reduction Index (SRI)

Hz*	63	125	250	500	1K	2K	4K	8K
SRI (dB)	20	19	21	22	22	32	38	44

* Frequency

The KS1000 SRW insulated roof panel has a single figure weighted sound reduction $R_w = 25\text{dB}$.

Biological

Kingspan panels are normally immune to attack from mould, fungi, mildew and vermin. No urea formaldehyde is used in the construction, and the panels are not considered deleterious

Materials

Substrate

- Kingspan XL Forté, Kingspan Spectrum, Kingspan AQUAsafe, Kingspan AQUAsafe55 and Kingspan CLEANsafe: Metallic protected steel to BS EN 10346:2015.thickness 0.5mm.
CLEANsafe 15: Metallic protected steel to BS EN10346:2015.thickness 0.4mm.
- Stainless Steel: Austenitic Grade 316 stainless steel to BS EN 10088: Part 2: 2014, thickness 0.4mm.
- Aluminium: Please contact Kingspan envirocare Technical Services.

Coatings - External Weather Sheet

- Kingspan XL Forté: consists of a multi-layer organic coating, embossed with a traditional leather-grain finish.
- Kingspan Spectrum: Consists of a coated semi-gloss finish with slight granular effect.

Coatings - Internal Liner Sheet

- Kingspan CLEANsafe 15: The coating has been developed for use as the internal lining of insulated panels. Standard colour is "bright white" with an easily cleaned surface.
- Kingspan AQUAsafe: The coating has been developed for use as the internal lining of insulated panels to suit high humidity internal environments.
- Kingspan AQUAsafe 55: The coating has been developed for use as the internal lining of insulated panels to swimming pool internal environments.
- Kingspan CLEANsafe 120: The coating has been developed for use as the internal lining of insulated panels where a high level of cleanliness and hygiene is required, and the panels are to be cleaned down on a regular basis.
- Stainless Steel: The stainless steel liner has been developed for use as the internal lining of insulated panels in buildings with a very aggressive/corrosive internal environment.

KS1000 SRW

Sinusoidal

Panel End Cut Back

Standard Cut Back Eaves	75mm
Standard Cut Back Endlap	150mm

Product Tolerance

Cut to Length	-5mm +5mm
Cover Width	-0mm +3mm
Thickness	-2mm +2mm
End Square	-3mm +3mm

Handing

The KS1000 SRW insulated roof panel can be manufactured in both left to right handed (LH) and right to left handed (RH).

Seals

Factory applied side and end lap weather seals

Quality & Durability

KS1000 SRW insulated roof panels are manufactured from the highest quality materials, using state of the art production equipment to rigorous quality control standards, complying with BS EN ISO 9001 Standard, ensuring long term reliability and service life. The panels are also being manufactured under Environmental Management System Certification BS EN ISO 14001. Compliant to BS OHSAS 18001 Occupational Health and Safety. The KS1000 RW roof panels are CE marked to BS EN 14509: 2013.



Warranty

Kingspan Panel Warranty covering the following subject to project specific information:

- 25 year thermal performance warranty;
- 25 year structural performance warranty;
- Up to 40 year external coating warranty.

Packing

KS1000 SRW insulated roof panels are stacked weather sheet to weather sheet (to minimise pack height). The top, bottom, sides and ends are protected with foam and timber packing and the entire pack is wrapped in plastic.

Core Thickness (mm)	40	60	80
No. of panels in Pack	10	8	8

Note: Applies to UK pack sizes. Please contact Kingspan Technical Services for export information.

Sea Freight

Fully timber crated packs are available on projects requiring delivery by sea freight shipping, at additional costs. Alternatively, steel containers can be used. Special loading charges apply.

Delivery

All deliveries (unless indicated otherwise) are by road transport to project site. Off-loading is the responsibility of the client.

Site Installation Procedure

Site assembly instructions are available from Kingspan envirocare Technical Services.

KS1000 SRW

Sinusoidal

Structural Tables

Unfactored load/span table (to be compared against calculated design wind load values unfactored)

Outer Sheet 0.5mm (Steel), Inner Sheet 0.4mm (Steel)

Single Span Condition

Core Thickness (mm)	Load Type	Uniformly distributed imposed load, kN/m ²							
		Span L in metres							
		1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
40	Downwards	3.29	2.77	2.13	1.65	1.29	1.01	0.80	0.63
	Suction	3.40	2.92	2.55	2.12	1.77	1.50	1.30	1.13
60	Downwards	4.63	3.92	3.13	2.52	2.04	1.67	1.37	1.12
	Suction	4.71	3.64	2.91	2.39	2.00	1.70	1.47	1.28
80	Downwards	5.93	5.09	4.16	3.43	2.85	2.38	1.99	1.68
	Suction	5.25	4.08	3.27	2.68	2.25	1.91	1.65	1.44

Double Span Condition

Core Thickness (mm)	Load Type	Uniformly distributed imposed load, kN/m ²							
		Span L in metres							
		1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
40	Downwards	3.29	2.80	2.44	2.15	1.93	1.74	1.59	1.46
	Suction	3.40	2.92	2.55	2.12	1.77	1.50	1.30	1.13
60	Downwards	4.58	3.96	3.41	2.91	2.53	2.21	1.96	1.74
	Suction	3.40	2.85	2.43	2.11	1.86	1.66	1.47	1.28
80	Downwards	5.19	4.56	3.85	3.31	2.88	2.53	2.24	2.01
	Suction	4.28	3.60	3.09	2.68	2.25	1.91	1.65	1.44

Notes:

1. Values have been calculated using the method described in BS EN 14509 2013, for medium and light coloured panels.
2. Deflection limit for: downward loading is L/200 and suction loading is L/150
3. The actual wind suction load resisted by the panel is dependent on the number of fasteners used and the purlin thickness as well as the fastener material.
4. The fastener calculation should be carried out in accordance with the appropriate standards. For further advice please contact Kingspan envirocare Technical Services.
5. The allowable steelwork tolerance between bearing planes of adjacent supports is +/- 5mm
6. Load span tables for the panel specifications not shown are available from Kingspan envirocare Technical Services.
7. FM approved panels spans must be limited to a maximum of 2 metres in single/double/multi-span condition.

UK

Kingspan Limited
Greenfield Business Park No. 2,
Greenfield, Holywell, Flintshire,
North Wales, CH8 7GJ
T: +44 (0) 1352 716100
F: +44 (0) 1352 710161
www.kingspanpanels.co.uk

For the product offering in other markets
Please contact your local sales representative
or visit www.kingspanpanels.com

Care has been taken to ensure that the contents of this publication are accurate, but Kingspan Limited and its subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use of application of products or methods of working are for information only and Kingspan Limited and its subsidiaries accept no liability in respect thereof.

xx/2018