

PROGRP
ADVANCED GLASSFIBRE ROOFING SYSTEM

Leadax[®]

CROMAR
Building Products

Elastathane
RAPID CURE ONE COAT POLYURETHANE WATERPROOF COATING **Extreme**

RubberCoat
LIQUID RUBBER ROOF COATING

PRORIDGE

CROMAPOL

PROGRP
Flexiglass
GRP multi surface overlay

VENT'3[®]

Breathable membranes

CROMAR 
Building Products

Product Guide

Introduction

Since its formation in 1997, Cromar Building Products has taken advantage of its independent ownership to respond to market demands and provide customers throughout the UK and Ireland with exceptional service and value. Our extensive range provides merchants with a one stop shop for all flat and pitched roofing products along with a full portfolio of building chemicals, timber treatments, adhesives, sealants, tanking membranes and DPCs. Continuous investment in research and development enables us to extend the diverse portfolio of products manufactured

at our North Yorkshire base. This culminated in a seven figure investment for the design and construction of one of the most modern roofing underlay manufacturing facilities in Europe. Consequently, our lead times have been consistently among the best in the industry. As a supplier to roofing, builders' and agricultural merchants throughout the UK and Ireland, Cromar is a member of NMBS so members have complete flexibility to buy from us without restriction. Our Associate Membership of the

NFRC also illustrates our commitment to improving quality standards in the roofing industry. At a time of continuing mergers, acquisitions and consequent reduction in supplier choice, we take pride in the fact that Cromar's independence gives us the flexibility to respond quickly to new and changing customer needs. This is why we not only supply one of the largest ranges in the industry but one which can be guaranteed to be at the forefront of new developments..

Contents

Leadax	03
Flexiglass	04-05
Pro GRP	06-07
Elastathane / Cromapol	08-09
Underlays	
Breathable and Non Breathable Vent 3 Pro Vent 3 Vent 3 Classic Vent 3 Light Protect 1F Premiair Classic Xtra	10-11
Ridge Kit / Dry Verge systems	12
Roof Accessories / Leadfree	13
GRP Valley Troughs / Cromaverge	
Pro Valley and Bonding strips	14
Roofing Felts	15
Waterbased Coatings	16
Bitumen Coatings	17
Timber Treatments	16-17
Construction Chemicals	18
Sealants	19



Sales Director
Daniel Marshall Tel: 07770 514 111 Email: daniel@cromar.uk.com

Area: Scotland / Ireland
Name: Sales Office
Tel: 01977 663 133
Email: sales@cromar.uk.com

Area: Yorkshire / North East
Name: Gareth Kitchen
Tel: 07794 363 027
Email: garethkitchen@cromar.uk.com

Area: North West
Name: Adam Tempest
Tel: 07538 124 038
Email: adam@cromar.uk.com

Area: Midlands
Name: Danny Wall
Tel: 07929 607 078
Email: danny.wall@cromar.uk.com

Area: South East
Name: Grahame Wratten
Tel: 07812 582 656
Email: grahame@cromar.uk.com

Area: South West
Name: John Bain
Tel: 07747 136 869
Email: john.bain@cromar.uk.com



Area: AlphaChem
Name: Greg Senior
Tel: 07767 426 366
Email: greg@cromar.uk.com

Area: AlphaChem
Name: Adam Hewitt
Tel: 07903 155 612
Email: adamhewitt@cromar.uk.com

Area: AlphaChem
Name: Mark Jones
Tel: 07903 155 632
Email: mark@cromar.uk.com

Area: AlphaChem
Name: Jake Senior
Tel: 07903 155 629
Email: jake@cromar.uk.com



NFRC
LEADING ROOFING EXCELLENCE



Contact

For more information, sales and technical support please contact us on:
Tel: 01977 663 133
Fax: 01977 662 186
email: sales@cromar.uk.com

Or visit our website for up to date product information, datasheets, and downloads
www.cromar.uk.com



/cromarbuildingproducts



/CromarProducts



/company/cromarbuildingproducts

Leadax[®]

CROMAR
Building Products

The New Lead

The superior features of Leadax

Flexible



Lightweight



6m Roll Length



No Scrap Value



BBA Certified



Sustainable



Leadax is the first lead substitute in the world that looks like lead, dresses like lead & is a malleable & pliable as lead. Leadax has the same unique properties as traditional water resistant materials such as Lead & Zinc, without having to compromise on quality, flexibility or price. Leadax is applied in exactly the same way as Lead & is equivalent to code 5.



All-purpose adhesive for fixing Leadax to the base material or for overlapping.




Mould Leadax around roof tiles or difficult details.



For use with above-ground masonry Leadax fixing clips allow you to attach Leadax into masonry joints quickly and easily.



Cut Leadax to size quickly and easily.

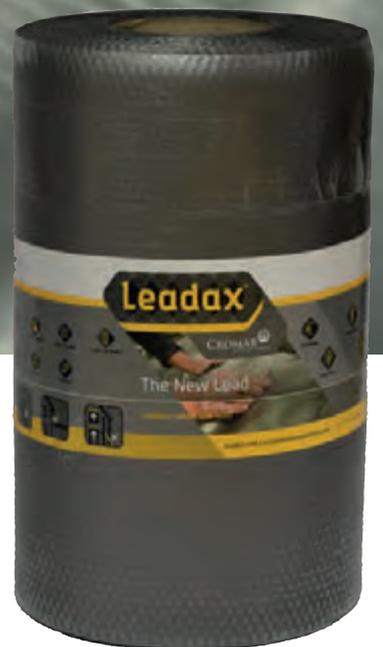

Available sizes:
150mm x 6m
200mm x 6m
250mm x 6m
300mm x 6m
400mm x 6m
450mm x 6m
600mm x 6m
1000mm x 6m



PROGRP Flexiglass

GRP multi surface overlay

Flexiglass is a flexible multi surface single resin GRP overlay system, designed to work on existing roofs, providing a hard wearing and rapid curing solution.



Benefits:

Styrene free

Overlay resin system

High flex resin properties

Rapid cure system

Applications:

Roofing Felt

Asphalt

Single ply membranes

Metals


Existing liquid applied systems

10 YEAR WARRANTY

- Primer
- 1st coat of Flexiglass
- Matting reinforcement
- 2nd coat of Flexiglass

20 YEAR WARRANTY

- Primer
- 1st coat of Flexiglass
- Matting reinforcement
- 2nd coat of Flexiglass
- 3rd coat of Flexiglass

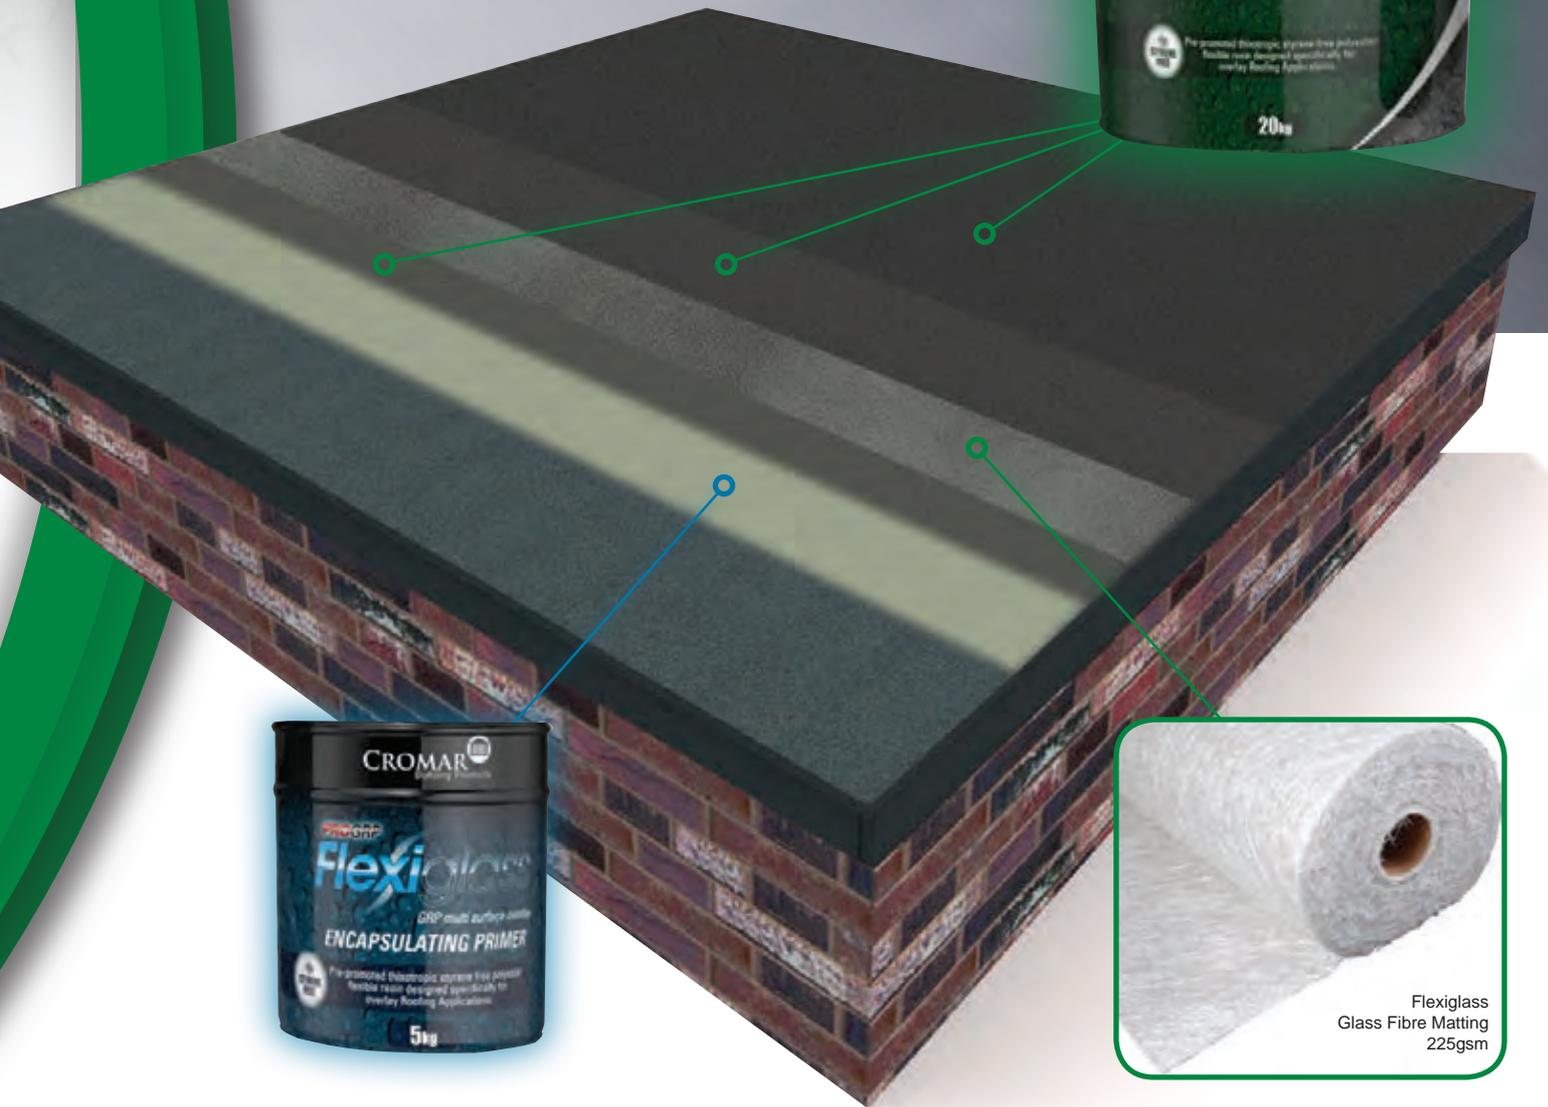

Flexiglass
Glass Fibre Matting
225gsm

PROGRP

ADVANCED GLASSFIBRE ROOFING SYSTEM

No Joints
No Seams
No Leaks



Benefits of a GRP System

- COLD APPLIED
no heat required
- EASY TO FORM
around complex situations
- VERY DURABLE
resists heavy foot traffic
- NON-SLIP WALKWAYS
can be incorporated
- CLASS LEADING ROOFING SOLUTION
that far exceeds traditional methods
- VIRTUALLY MAINTENANCE FREE
for very long periods of time
- IMPACT RESISTANT
due to its ultra hard finish
- FIRE RETARDANT
- HIGHLY ECONOMICAL SOLUTION



Available in
10kg / 20kg

Available in
1ltr / 5ltr

Available in
10kg / 20kg

Available in
5ltr / 25ltr

Available in
310ml



Glass Fibre Matting
Available in rolls of
6.75kg / 16.5kg / 33kg



Glass Fibre Finishing Tissue
100mm x 250m

Application Rollers



Dispensing
Bottle



Brushes



Laminating Rollers

3m Trim Selection



Drip Trim A170 A200 A250	Raised Edge Trim B230 B260 B300	Simulated Lead C100	Internal & External Angle INT195 EXT195	Wall Fillet D260	Expansion Joint E280
-----------------------------------	--	------------------------	---	---------------------	-------------------------

Flat Flashing



F300
300mm x 20m

Corner Selection



C1 Universal External Corner
C2 Fillet to trim
C3 Internal & External fillet corner
C4 Universal Internal Corner
C5 Large roof ridge closure
C6 Small roof ridge closure

What is PRO GRP?

GRP stands for Glass Reinforced Polyester. GRP is also known as Glass-Fibre. This system is cold applied on site, giving it a seamless and flexible weatherproof finish that resists water, heat and frost. The resulting surface gives a strong architectural finish that looks very impressive. If maintained properly it will last as long as the building stands.

We have developed this technology further to produce the perfect all weather protection for any flat roof. PRO GRP can be applied in small domestic situations right through to large industrial environments.



HEAT RESISTANT



STORM PROOF



FROST PROOF




FIRE RESISTANT



FOOT TRAFFIC



IMPACT RESISTANT

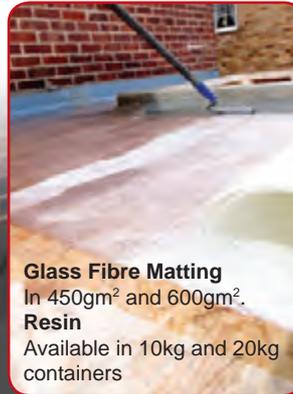

Glass Fibre Matting
In 450gm² and 600gm².
Resin
Available in 10kg and 20kg containers




Top Coat UV and final weatherproofing protection
Available in 10kg and 20kg containers



Wall Fillet
Available in 3m lengths



Simulated Lead Flashing
Available in 3m lengths



Firrings added to aid run off.



Trim Adhesive
Available in 310ml



Raised Edge Trim
Available in 3m lengths



Large Fascia Trim
Fascia / Drip Trim
Available in 3m lengths

Also available
Glass Fibre Roofing Kit
Covers approx. 13m²





Super Seal Primer
Polyurethane based primer for next day topcoating.
Available in: 5kg



Universal Primer
Polyurethane based primer for same day topcoating.
Available in: 1kg | 4kg



Elastapaste
Thixotropic paste designed for vertical surfaces and upstand applications



Elastathane 25
PU Adhesive
Available in: 310ml

CROMAPOL

One Coat Instant Waterproofing



Cromapol will waterproof instantly, even while wet, and will not wash off while curing. It is ideal for use in damp conditions. Will withstand ponding and covers in only one coat*.



- Grey
- Black
- White

Sizes
1kg | 2.5kg | 5kg | 20kg

CROMAPOL ADVANTAGES

- Great adhesion | Application in damp weather | Instant protection
- No wash off | Excellent solar reflectivity | Reinforced membrane
- Application in one coat | Seamless | Fully flexible | Unaffected by temperature | Economical

Elastathane Extreme

RAPID CURE ONE COAT POLYURETHANE WATERPROOF COATING



Elastathane Detailer
Detailer for vertical applications
A thixotropic and fibre-reinforced, one component polyurethane liquid membrane used for waterproofing and protection of roof detail structures.
Available in: 5kg | 15kg



Elastathane Seam Tape
10m x 100/150mm



Elastathane 25
High Performance Polyurethane Coating
Available in: 25kg | 15kg | 6kg

Advantages

- Simple application | Totally seamless
- resistant to water and frost | Excellent thermal resistance
- Excellent weather and UV resistance | Solar reflective
- Maintains its mechanical properties from -40°C to + 80°C
- Excellent adhesion to almost any type of surface

Waterproofing protection of

- Roofs
- Bitumen Felts
- EPDM
- PVC Membranes
- Acrylic Coatings
- Balconies
- Pavements & Carports
- Concrete Constructions
- Bridge Decks

WATERPROOF PROTECTION OF:

Flat and pitched roofs | Corrugated asbestos | Roof lights | Flashing
Roofing felts | Gutters | Slate | Asphalt | Lead | Glasshouses | Metal | Fibreglass



Cromapol Clear
The Benefits are Clear
A clear fibre free acrylic roof coating designed for use predominantly on roof lights and to provide a clear weather proof protection to most common surfaces.

Sizes
5kg | 20kg



**Cromapol
Emergency Roof Repair**

Colours Available

- Grey
- Black
- White

Sizes
1kg



Sizes
1m x 50m

Reinforcement Scrim

- Use when extra reinforcement is required.
- Cracks in corrugated asbestos and gutters
 - Splits in felt and asphalt roofing
 - Gutters



Roofing Underlays

The Vent3® Range of Air Permeable and Breathable Underlays



Vent3® Premi Air


A heavyweight performance breathable roof underlay for cold and warm roof application requires no ventilation.

- Cold & Warm roof application
- 3 layer spun-bonded membrane
- Clean and easy to use
- Heavyweight performance & Flexibility
- Excellent tensile strength
- Light Blue Surface prohibits glare
- No gusting wind noise
- UV stable for up to 4 months
- Excellent nail tear resistance

Roll sizes available:
50m x 1m

Batten Gauge	Zone Suitability
≤ 345mm	1-3
≤ 250mm	1-5
≤ 100mm	1-5

160
gsm

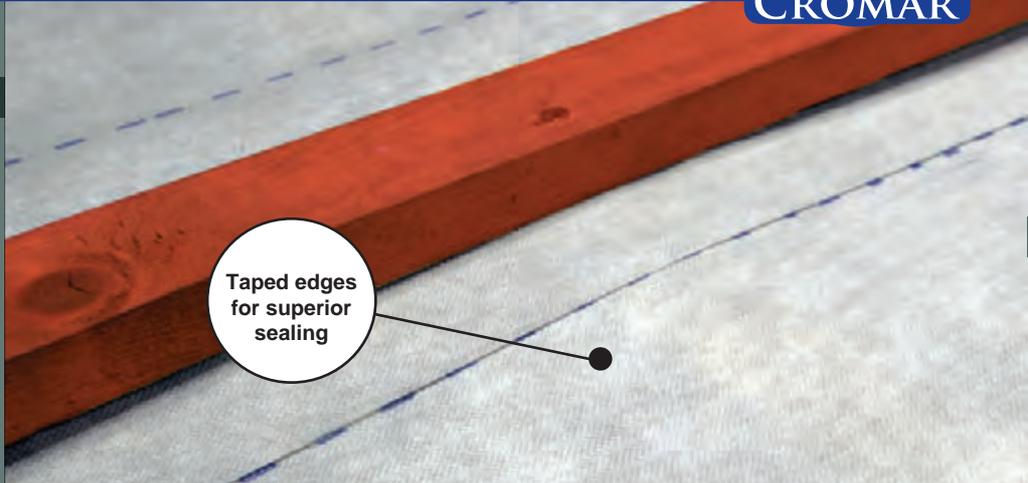

Taped edges
for superior
sealing

Vent3® Classic Xtra

A taped breathable roof underlay for cold and warm roof applications which give major benefits over traditional roof underlays.

Batten Gauge	Zone Suitability
≤ 345mm	1-5

- BBA certified
- Cold & warm roof application
- 3 layer spun-bonded membrane
- Clean & easy to use
- Lightweight & flexible
- Excellent tensile strength
- Light grey surface prohibits glare
- UV stable for up to 3 months
- Requires no ventilation

Roll sizes available:
25m x 1m | 50m x 1m
50m x 1.5m



115
gsm



Protect1F®

Is a non breathable roof underslating which gives major benefits over plastic and traditional 1F bitumen based underslating felt.

Roll sizes available:
15m x 1m | 45m x 1m

BS5534:2014 Annex A Zone suitability



- Zone 5
- Zone 4
- Zone 3
- Zone 2
- Zone 1

Zone suitability applies only for underlays in applications where a well-sealed ceiling is present, ridge height is not greater than 15m, roof pitch is between 12.5° and 70°, site altitude is not greater than 100m, and no significant site topography is present. Other applications might require underlays with greater wind uplift resistance and it is advisable to seek professional advice. Zones 3 & 4 apply to Northern Ireland.

Vent3® Pro

A heavyweight performance breathable roof underlay for cold and warm roof application requires no ventilation.



- BBA certified
- Cold & Warm roof application
- 3 layer spun-bonded membrane
- Clean and easy to use
- Heavyweight performance & Flexibility
- Excellent tensile strength
- Green Surface prohibits glare
- No gusting wind noise
- UV stable for up to 3 months
- Excellent nail tear resistance

Batten Gauge	Zone Suitability	Batten Gauge	Zone Suitability
Lap Fixing Batten		Lap Fixing Batten	
≤ 345mm	1-4	≤ 250mm	1-5
Taped		Taped	
≤ 345mm	1-5	≤ 250mm	1-5



165 gsm

Roll sizes available:
50m x 1m | 50m x 1.5m



Vent3®

A high performance breathable roof underlay for cold and warm roof application requires no ventilation.



- BBA certified
- Cold & Warm roof application
- 3 layer spun-bonded membrane
- Clean and easy to use
- Excellent tensile strength
- No gusting wind noise
- UV stable for up to 3 months
- Excellent nail tear resistance

Batten Gauge	Zone Suitability	Batten Gauge	Zone Suitability
Lap Fixing Batten		Lap Fixing Batten	
≤ 345mm	1-3	≤ 250mm	1-5
Taped		Taped	
≤ 345mm	1-5	≤ 250mm	1-5



135 gsm

Roll sizes available:
25m x 1m | 50m x 1m | 50m x 1.5m

Vent3® Classic

A breathable roof underlay for cold and warm roof applications which give major benefits over traditional roof underlays.



- BBA certified
- Cold & warm roof application
- 3 layer spun-bonded membrane
- Clean & easy to use
- Lightweight & flexible
- Excellent tensile strength
- Light grey surface prohibits glare
- UV stable for up to 3 months
- Requires no ventilation

Batten Gauge	Zone Suitability	Batten Gauge	Zone Suitability
Lap Fixing Batten		Lap Fixing Batten / Taped	
≤ 345mm	1-2	≤ 250mm	1-5
Taped		Taped	
≤ 345mm	1-5	≤ 250mm	1-5



115 gsm

Roll sizes available:
25m x 1m | 50m x 1m | 50m x 1.5m

Vent3® Light

A lightweight breathable roof underlay for cold and warm roof applications which give major benefits over traditional roof underlays.



- BBA certified
- Cold & warm roof application
- 3 layer spun-bonded membrane
- Clean & easy to use
- Lightweight & flexible
- Excellent tensile strength
- Light grey surface prohibits glare
- UV stable for up to 3 months
- Requires no ventilation

Batten Gauge	Zone Suitability	Batten Gauge	Zone Suitability
Lap Fixing Batten		Lap Fixing Batten	
≤ 345mm	1	≤ 250mm	1-5
Taped		Taped	
≤ 345mm	1	≤ 250mm	1-5



95 gsm

Roll sizes available:
25m x 1m | 50m x 1m | 50m x 1.5m

PRO RIDGE

Universal Ridge & Hip System

BS 8612: Dry Fixed Ridge, Hip and Vergé Systems for Slating and Tiling



- Dry fixing - application in all weathers
- Quicker and easier to install over the mortar alternative
- Competitively priced
- Screws and clamps in pre assembled bag for speedy installation

320mm wide ridge roll
Ensures 75mm coverage at any pitch.
(Wider than any other manufacturer/supplier)

- Perforated roll for additional ventilation.
- Vapour permeable, wind & rain resistant.
- Extra wide 25mm butyle adhesive strip.



**Stainless Steel
Ridge batten
fixing straps**

**100mm
Stainless Steel
Fixing screws**

**Self sealing polyamide
clamping plate**
(No washer required)

Universal ridge union

- Patented ridge union design
- Universal ridge union works with most ridge tiles



Pro Ridge kit:
3m, 5m and 6m



Ridge Accessory Pack
50 x Clamping Plate
50 x 100mm Fixing Screw
50 x Universal Ridge Union



Hip Accessory Pack
6m: 20 x Hip Clips 6 x 1.2m Hip Tray
5m: 17 x Hip Clips 5 x 1.2m Hip Tray
3m: 10 x Hip Clips 3 x 1.2m Hip Tray

LEFT AND RIGHT HANDED Dry Vergé System

- Fast fitting time
- Easy installation
- Compatible with most roof tiles
- Maintenance free
- 10 Year UV protection
- Attractive and functional appearance
- No need to cut or move tiles*
- Can be fitted in all weather
- Secure fixing offering better resistance to wind uplift

Available in left and right handed long and short sections.

Available colours:



Standard version



Angled ridge cap



Half round ridge cap



End caps



* Applies to most standard roofs

Roof accessories

Roof ventilation, Ridge Kits and Dry Verge

Ventilated Tile Range

Will fit most major manufacturer's tiles. Inline or cowl. The low line 10k ventilation area is virtually flat with the sheet, whilst the 10k and 20k cowl in terracotta, slate grey, red and brown as standard.

Tile Vent - Flat

Suitable for:

- Russell Galloway, Grampian, Lotian, Moray
- Marley Modern
- Sandtoft Plain
- Redland Stonewold

Tile Vent - Double Pantile

Suitable for:

- Sandtoft Double Pantile
- Redland Double Pantile, Grovebury
- Russell Penine
- Marley Mendip

Tile Vent - Profile

Suitable for:

- Redland Brown
- Russell Cheviot
- Marley Ludlow
- Sandtoft Lindum

Tile Vent - Double Roman

Suitable for:

- Marley Double Roman
- Sandtoft Double Roman
- Redland 50 Double Roman
- Russell Double Roman

Universal Tile Ventilators

Designed to be unobtrusive and for use with the majority of manufacturers profiles and colours. Available as 10k or 20k Cowl and new Solar tiles. Moulded in 'HIPS' with UV stable paint to suit most colours.

Slate Vents

Designed to be both unobtrusive and practical. Available as low Line or Raised Cowl in Riven or Pinseal finishes in all standard slate sizes. The low line 10k ventilation area is virtually flat with the sheet, whilst the 10k and 20k cowl type have patented 'anti-splash sleeve' devices and fly screen protection.

Plain Tile Ventilators

Injection moulded offering precision and strength. Designed to suit all plain clay tiles and can be fitted without cutting the tiling battens. Suitable for pitches of 30° and above.

Pipe Adapters

Square to round
110mm & 160mm

Pipe Adapters

Rectangle to round
110mm

Accessories

Flexi tube
with clips
112mm



3-in-1 Ventilated Eaves Protector

The fast and easy way to ventilate and protect at the eaves, consisting of a 1000mm over fascia vent with intergrated underlay support tray and eaves comb filler.

Bird Comb Filler

A physical barrier that prevents birds, bats and insects entering the roof void between the felt and tiles and causing nesting and infestation problems.

Available in size: 1000mm



Over Fascia Vent

Available in 2 ventilation capacities.

Allows an air stream in to the roof void between the felt and fascia board.

Available in sizes:

- 1000 x 10mm
- 1000 x 25mm



Underlay Support Trays

A support tray to ensure any underlay is not carried into the gutter, and prevents water ponding behind the fascia. Therefore reducing long term maintenance to the eaves of a building.

Size available:
1.5M X 300mm



5U Eaves Protector Strip

A support strip to ensure any underlay is not carried into the gutter, and prevents water ponding behind the fascia. Therefore reducing long term maintenance to the eaves of a building.

Size available:
16m X 333mm



Continuous Rafter Tray

Allows a constant flow of air between the loft space and outside meaning built-up moisture can escape.

Available in sizes:

- 6000 x 300mm
- 6000 x 400mm
- 6000 x 600mm
- 6000 x 800mm

Disc soffit Vent

Easy to install circular vent provides eaves ventilation through the soffit for new build or re-roofing.

Colours:

White | Black | Brown | Tan



LEAD-FREE PLUS

Is a high performance low cost aluminium self adhesive flashing suitable for use as an alternative to traditional lead in both flat and pitched roof applications.

Typical Installation

- Abutments ■ Chimneys ■ Dormers ■ Saddles
- Soakers ■ Stepped ■ Valleys ■ Windows/ Rooflights ■ Gutters

Cromar Flashing Tape

Self adhesive bitumen coated, heavy duty lead look finish for trade use.

Sizes available:

- 50mm x 10m in boxes of 6
- 75mm x 10m in boxes of 4
- 100mm x 10m in boxes of 3
- 150mm x 10m in boxes of 2
- 225mm x 10m in boxes of 2
- 300mm x 10m in boxes of 1
- 450mm x 10m in boxes of 1
- 600mm x 10m in boxes of 1



The THICKER than standard aluminium surface has a unique 3 dimensional pattern, which provides additional strength for all roofing applications.

Product Data	150	300	450
Roll width/mm	150	300	450
Roll weight/kilos	1.5	3	4.5
Roll length/metres	5	5	5
Rolls/box	1	1	1
Rolls/pallet	144	72	48

Patination Oil

Specially developed to reduce unsightly staining and provides a pleasing appearance to newly applied lead sheet and flashings.

Sizes available:
1 Litre



The cost effective alternative to lead gutters

V-Flow valley troughs can be used with clay or concrete tiles or slate roofs, as well as profiled GRP or metal roofs. Options are available for wet or dry fixing (with or without mortar).

- Life expectancy of over 30 years
- Convincing simulation of traditional lead
- Light and easy to transport, handle and install
- Virtually maintenance-free
- Manufacture assured to BS EN ISO 9001
- BBA Certification (No 18/5546)

Single lap tile - over batten fix 360mm x 3m



GTB13 Narrow Valley Trough

Single lap tile - over batten fix 400mm x 3m



GTB14 Standard Valley Trough

for use with concrete/clay tiles or slate roofing
225mm x 3m 110mm centre upstand



GDFBS110 Dry-fix Bonding Strip

216mm x 3m



GJS1 Secret Joining Strip

for use with natural or man-made slates



GDFVT70 Dry Valley Trough

for use with natural or man-made slates
225mm x 3m
70mm
centre
upstand



GDFBS70 Dry-fix Bonding Strip

for use with concrete/clay tiles or slate roofing
400mm x 3m



GDFVT110 Dry Valley Trough

140mm x 3m



GAS1 Abutment Soaker

Flat fix 400mm x 3m



GTF14 Standard Valley Trough


Double lap - slate & tiles 330mm x 3m



GSVT1 Standard Valley Trough

PRO dry valley & PRO bonding strips

PRO DRY FIX
BONDING GUTTER
PRO BONDING STRIP
100mm/3000 x 225mm
PRO BONDING STRIP
70mm/3000 x 225mm

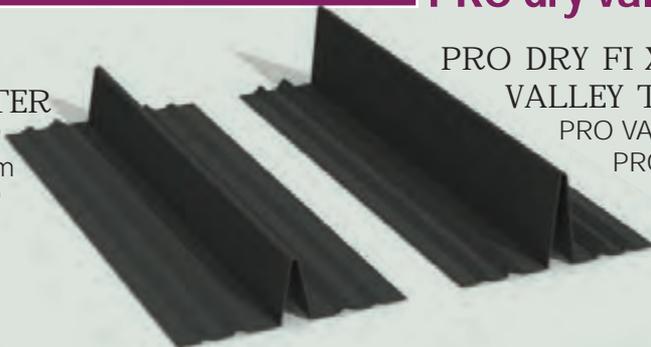

PRO DRY FIX
VALLEY TROUGH

PRO VALLEY 105mm/3000 x 400mm
PRO VALLEY 80mm/3000 x 400mm
PRO VALLEY 55mm/3000 x 400mm



Available in: Grey | Brown | Terracotta | Black

CROMAVERGE U

PREMIUM UNIVERSAL DRY VERGE

Benefits & Features

- Universally handed - no need for left and right units
- Quick fit design - 36 units in under 5 minutes
- Versatile - fit to any type of roof tile
- High compression - roof tiles held firm in strong winds
- Zero maintenance - years of mortar free protection
- High quality - tough and UV stable plastic
- Mortar-free - eaves remains protected but well ventilated

Roofing Felts

Torch-on and Oxidised Bitumen

A comprehensive range of SBS, APP and traditional roofing felts. Our products cover all specification options, whether the need is for high performance, torch-on or traditional pour and roll felts.



95/25 Oxidised Bitumen
23kg Slabs x 50 to a pallet

CROMATORCH TORCH-ON ROOFING FELT IDROPOL APP -5°C Cold bend flexibility

Type/Finish	Pallet Qty	Weight	Roll Length
U/lay 2kg	33	32kg	16m x 1m
Cap Sheet Sand 4kg	30	32kg	08m x 1m
Cap Sheet Green 4.5kg	30	36kg	08m x 1m

CROMATORCH TORCH-ON ROOFING FELT Arcoflex SBS -15°C Cold bend flexibility

Type/Finish	Pallet Qty	Weight	Roll Length
U/lay Sand 2kg	30	32kg	16m x 1m
U/lay Glossy Finish 2kg	30	32kg	16m x 1m
Perforated U/lay 800gsm	30	24kg	30m x 1m
Cap Sheet Sand 4kg	30	32kg	08m x 1m
Cap Sheet Grey/Green 4.5kg	25	36kg	08m x 1m
Cap Sheet Black/Charcoal 4.5kg	25	36kg	08m x 1m
Cap Sheet Brown 4.5kg	25	36kg	08m x 1m



Traditional Felts

FIBRE BASED / OXIDISED BITUMEN

Type	Finish	Pallet Qty	Weight	Roll Length
Shedfelt	Sand	80	0.7kg	05m x 1m
Shedfelt	Sand	48	14kg	10m x 1m
Bonding Felt-Standard	Sand	42	18kg	10m x 1m
Bonding Felt-Standard	Sand	25	36kg	20m x 1m
Shedfelt	Green	63	10kg	05m x 1m
Shedfelt	Green	42	20kg	10m x 1m
Shedfelt	Green	20	40kg	20m x 1m
Mineral Felt	Green	25	38kg	10m x 1m
1F Underslating Felt	Sand	36	22.5kg	15m x 1m

GLASS BASE / OXIDISED BITUMEN

3B Bonding Felt	Sand	25	36kg	20m x 1m
3E Cap Sheet	Green	30	28kg	10m x 1m
3G Perforated underlay	Sand	30	26kg	10m x 1m
3H Venting base Layer	Sand	25	34kg	20m x 1m

HIGH PERFORMANCE FELTS POLYESTER BASE / OXIDISED BITUMEN

10 YEAR GUARANTEED MINIMUM LIFE EXPECTANCY

5U	High Performance U/lay 125	Sand	30	29kg	16m x 1m
-	High Performance U/lay 180	Sand	25	36kg	20m x 1m
-	High Performance Cap 180	Green	25	34kg	10m x 1m
-	High Performance Sand 250	Sand	25	40kg	20m x 1m
-	High Performance Cap 250	Green	25	40kg	10m x 1m
5B	High Performance Sand 350	Sand	30	34kg	08m x 1m
5E	High Performance Cap 350	Green	25	38kg	08m x 1m

Cromar DPC's and DPM's can be used for traditional housing grade damp-proofing through to high performance tanking applications - with three British Board of Agreement Certificates in support of our products.

Cromaseal 100
Self adhesive tanking membrane.
Sizes
20m x 1m

Damp Proof Membrane
Building film to BBA standard.
Sizes
4 x 25m

Polythene DPC (30m Rolls)
Economical DPC for D.I.Y. use.
sizes from
100 - 610mm.



RubberCoat

LIQUID RUBBER ROOF COATING

FLEXIBLE HEAVY DUTY LIQUID RUBBER WATERPROOF COATING



RubberCoat is a brush / roll-on high performance coating that can be applied over many surfaces including concrete, masonry, wood, brick, metal foam & more... Forms a durable, seamless, waterproof membrane. Use Indoor/Outdoor. Suitable for applications to steel & waterproof including bathrooms, basements, roofs, rain gutters, skylights, pipes, balconies & decks, planter boxes, shower pan liners, ponds & more!

- EASY TO APPLY - BRUSH, ROLLER & SQUEEGEE
- FLEXIBLE SEAMLESS TECHNOLOGY
- EXCELLENT UV, ADHESION & CHEMICAL RESISTANCE
- PROTECTS & BONDS TO VIRTUALLY ANY SURFACE
- EXCELLENT FREEZE / THAW RESISTANCE
- RESISTS CRACKING, CHIPPING, PEELING, IMPACT & ABRASION



Sizes Available
946ml

UNIVERSAL PRIMER

- BONDS TO EPDM, TPO & OTHER DIFFICULT SURFACES
- EASY TO APPLY - BRUSH, ROLLER OR SPRAY
- FLEXIBLE SEAMLESS TECHNOLOGY
- RESISTS CRACKING, CHIPPING, PEELING, IMPACT & ABRASION
- EXCELLENT FREEZE/THAW RESISTANCE

GENERAL APPLICATIONS

RubberCoat Universal Primer bonds to EPDM, TPO, PVC, concrete, metal, wood, shingle, brick, masonry, foam and more. RubberCoat Universal Primer is recommended for use as a primer for RubberCoat Waterproof Sealant.

Ideal as an EPDM patch repair primer when used in conjunction with RubberCoat waterproof coating

Rubbercoat + Universal Primer =
An ideal EPDM patch repair system

Sizes Available
3.78ltr | 18.9ltr



WATER-BASED ENVIRONMENTALLY SAFE



ZERO VOC's


RENOCOAT

WATER BASED ROOF TILE RENOVATION PAINT

A water based roof tile renovation paint is a quality acrylic coating to give a long lasting protective & decorative finish on slate and concrete roof tiles. RENOCOAT is suitable for use on all exterior roofs and has excellent adhesion properties on porous surfaces.


Sizes:
5.0 | 20.0

Colours available



Timber Treatments

Solvent and water based solutions for wood

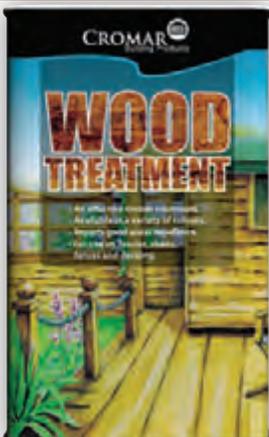


Colours available:
DARK BROWN
LIGHT BROWN
RED CEDAR
GREEN
RICH MAHOGANY
CLEAR

Wood Treatment

Solvent based decorative wood treatment ideal for use on fences and sheds.

Size:
1 litre, 2.5 litre, 5 litre, 25 Litre

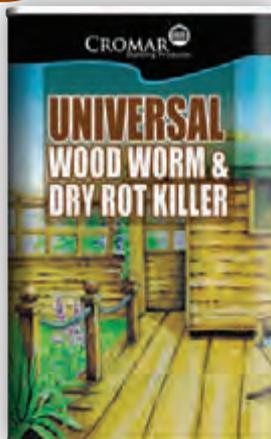

Universal Wood Worm and Dry Rot Killer

Solvent based wood treatment combined with a woodworm killer, a clear solution, can be used internally, ideally suited for treating timber prior to decorating.



Creotreat®

Petroleum based timber treatment and stain for all wooden fences and sheds. Also available in black

Size:
4 litre, 20 litre, 200 litre

Bitumen Products

Waterproofing, Roof Maintenance and Reflective Paints

Bitumen Roof Waterproofing Compounds continue to represent exceptional value for flat roof weatherproofing and emergency repairs. Our range covers every application including Cromaprufe which is a liquid damp proof membrane.



Cromasol
Solvent based reflective coating for use on bituminous surfaces. Can be used on roofs that are subject to standing rain water.

Colours:
Grey | White

Sizes:
5.0 | 20.0



Black Bitumen Paint
A general purpose paint for waterproofing and weather protecting steelwork and concrete.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Aluminium Paint (Contractor Grade)
Bright aluminium, traditional, solar reflective coating suitable for application to bituminous roofing substrates.

Premium grade also available

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Roofing Felt Adhesive
Cold applied bituminous adhesive for bonding successive layers of roofing felt.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Allweather Roofing Compound
Filled bituminous solution for overall waterproofing of roofs. Can be applied to dry surfaces all year round.

Sizes:
2.5 | 5.0 | 25.0



Cromaprufe
Rubberised bitumen emulsion. General purpose product used on walls and floors to prevent water ingress and dampness from the ground. Can also be used on roofs and as wood block floor adhesive.

Sizes:
2.5 | 5.0 | 25.0



Trowel Mastic
Heavy body bituminous mastic for sealing cracks and spills in roofing substrates and gutters.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Roofing Emulsion
Bituminous emulsion containing fillers which provides all over waterproofing of roofs leaving a smooth finish.

Size:
5 | 25.0



Bitumen Primer
Low viscosity bituminous primer for use on porous surfaces before remedial roof treatment, including pour and roll and torch-on felt applications.

Quick drying version also available.
Sizes:
1.0 | 2.5 | 5.0 | 25.0



Cold Gritting Adhesive
Cold applied bituminous adhesive for bonding chippings to flat or low pitched roofs.

Sizes:
5.0 | 25.0

Shed & Fence Treat Brush or Spray

Is a water based decorative timber treatment that brings to life the colour of new or previously treated timber. It is ideal for use on sheds, fences, timber posts and gates. An economical treatment that is harmless to animals and plants.

Size:
5 litre, 25 litre

Colours available:
DARK BROWN
LIGHT BROWN
RED CEDAR
GREEN



Decking Sealer

Protects timber from water damage. For Decking and External Timbers. Allows wood to breathe and weather naturally over time.

Size:
5 litre, 25 litre

Building Chemical

Admixtures, Surface Treatment and Bonding Agents

An ideal variety of products for interior and exterior applications. This includes mortar tones in both liquid and powder form, to provide permanent colour to all types of mortar, renders and concrete. Alongside traditional mortar admixes, for ease of use and convenience.



Water Resistant Wood Adhesive

Easy to use wood glue that bonds to form a permanent and inseparable joint. Conforms to the requirements of the European Standard D3/3 and D3/4. Not suitable for joints subject to continuous water submersion.

Sizes:
500ml | 1.0 | 2.5 | 5.0 | 25.0



Contract PVA Bond

A contractor grade Multi-use admixture and adhesive used as a bonding agent, sealer and admixture for concrete mortars and plasters, for use internally.

Sizes:
0.5 | 1.0 | 2.5 | 5.0 | 25.0



PVA Bond

Multi-use admixture and adhesive to BS5270 used as a bonding agent, sealer and admixture for concrete mortars and plasters, for use internally.

Sizes:
0.5 | 1.0 | 2.5 | 5.0 | 25.0



SBR Bond

A styrene butadiene synthetic rubber bonding compound with excellent waterproofing properties. To be used externally this reduces cracking and shrinking in repair and screeding mixes.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Masonry Dry Rot Killer

To destroy and prevent reinfestation by wood rotting fungi particularly dry rot.

Sizes:
2.5 | 5.0 | 25.0



Stabilising Solution

Fine polymer emulsion which penetrates dusty, chalky and badly weather surfaces. Suitable for interior and exterior use.

Sizes:
2.5 | 5.0 | 25.0



Concrete Hardener & Dustproof

A reactive treatment for cement based flooring for new floors or to cure dusting on old poorly laid floors.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



3 in 1 Admixture

Triple action admixture. Waterproofs, plasticises and retards to assist workability reduce water penetration and allow larger areas to be covered in one application.

Sizes:
0.5 | 1.0 | 2.5 | 5.0 | 25.0



Moss & Mould Remover

To treat and remove active mildew, fungi and moss.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Brick & Patio Cleaner

An acid based solution for removing cement mortar stains from brick tiles, earthware and patios.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Block & Paving Sealer

A water based sealer for block paving and porous masonry. This reduces staining, loss of jointing sand and enhances appearance.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Liquid Mortar Tone

Formulated to provide a permanent colour to all types of mortars, rendering, concrete and pointing.

Colours:
Brown | **Black** | **Red**
Sizes:
1.0 | 2.5 | 5.0



Mortar Plasticiser

To BS 4887, liquid admixture used in bricklaying and plastering mortars to aid workability.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Integral Waterproof

Designed to improve resistance and the ingress of water in renders, mortars and concrete.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



Frostproof

Accelerator and plasticiser for use in structural and non-structural concrete.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



EXTERIOR WATER SEAL

Is a micro-porous clear waterproofing treatment for porous exterior surfaces such as brickwork, concrete and timber. Imparts superb, Long lasting water resistance.

Sizes:
1.0 | 2.5 | 5.0 | 25.0



More 2 Mix

New and Innovative concentrated product that is equivalent to 25 litres of normal plasticiser

Sizes:
1.0



Allweather Roofing Compound

Formulated to provide a permanent colour to all types of mortars, rendering, concrete and pointing.

Colours:
Brown | Black | Red | Yellow
Sizes:
1kg



White Spirits

Used for paint thinning and cleaning brushes after use. Complies with BS 245.

Sizes:
2litre | 5litre

Sealants Adhesives, Fillers and Foams



Decorators Caulk

A flexible water based filler and sealant that is easily applied, dries quickly and can be overpainted after 1-2 hours.

For sealing and filling gaps and cracks where movement can occur, such as those between plasterwork, window frames, door frames, skirting boards and architraves.

Colours:
White

25
per box



Lead Seal

A low modulus silicone specifically designed for use when sealing lead.

Colours:
Grey

25
per box



Roof & Gutter Sealant (Butyl)

5 year life performance, butyl rubber waterproof sealant, specifically developed for repairing leaking gutters, downpipes and flashing. Also suitable for bedding roofing sheets and felts.

Colours:
Black

25
per box



Gripstick

High performance solvent based gap filling adhesive.

Sizes:
310ml

12
per box



Supergrip (Solvent Free)

10 year life performance water based panel adhesive. Solvent free with excellent adhesion qualities. Replace nails and screws in a multitude of bonding applications.

25
per box



G.P. Silicone

Universal A competitively priced, high modulus silicone for use in all building applications. Contains fungicide.

Colours:
White | Clear
Brown | Black

25
per box



LMA Silicone

An extremely flexible low modulus acetoxo (LMA) silicone sealant with adhesion and excellent weathering properties. Conforms to BS 5889A.

Colours:
White | Clear

25
per box



Acrylic Frame Sealant

For sealing and filling gaps and cracks where movement can occur, such as those between plasterwork, window frames, door frames, skirting boards and architraves.

Colours:
White | Brown
Beige

12
per box



Foam - Hand Grade

An easy to use, Polyurethane based Expanding Foam for general Construction and Home improvement applications.

Sizes:
750ml

12
per box



The Business MS POLYMER

An all round durable, flexible adhesive and sealant based on MS Polymer technology. Has excellent adhesion to non-porous surfaces and is paintable with most paints. this product is odourless, neutral and free from isocyanates.

Colours:
White | Clear | Black

12
per box



SKELETON GUNS

Trade skeleton guns from Cox and D.I.Y skeleton guns both in 310ml and 400ml.

12
per box



FOAM APPLICATION GUN Contractors (Metal)



Foam - Gun Grade

Must only be used with a gun grade applicator of NBS system dispensing gun.

Sizes:
750ml

12
per box



UNITS 3,4,5 NORTHSIDE INDUSTRIAL ESTATE, WHITLEY BRIDGE, DN14 0GH

Tel: 01977 663 133 Fax: 01977 662 186 web: www.cromar.uk.com Email: sales@cromar.uk.com